




# Omotion Model 306 Initial Setup Manual



**\*Tools and items required:** Phillips screw driver and some type of padded material to lay on.

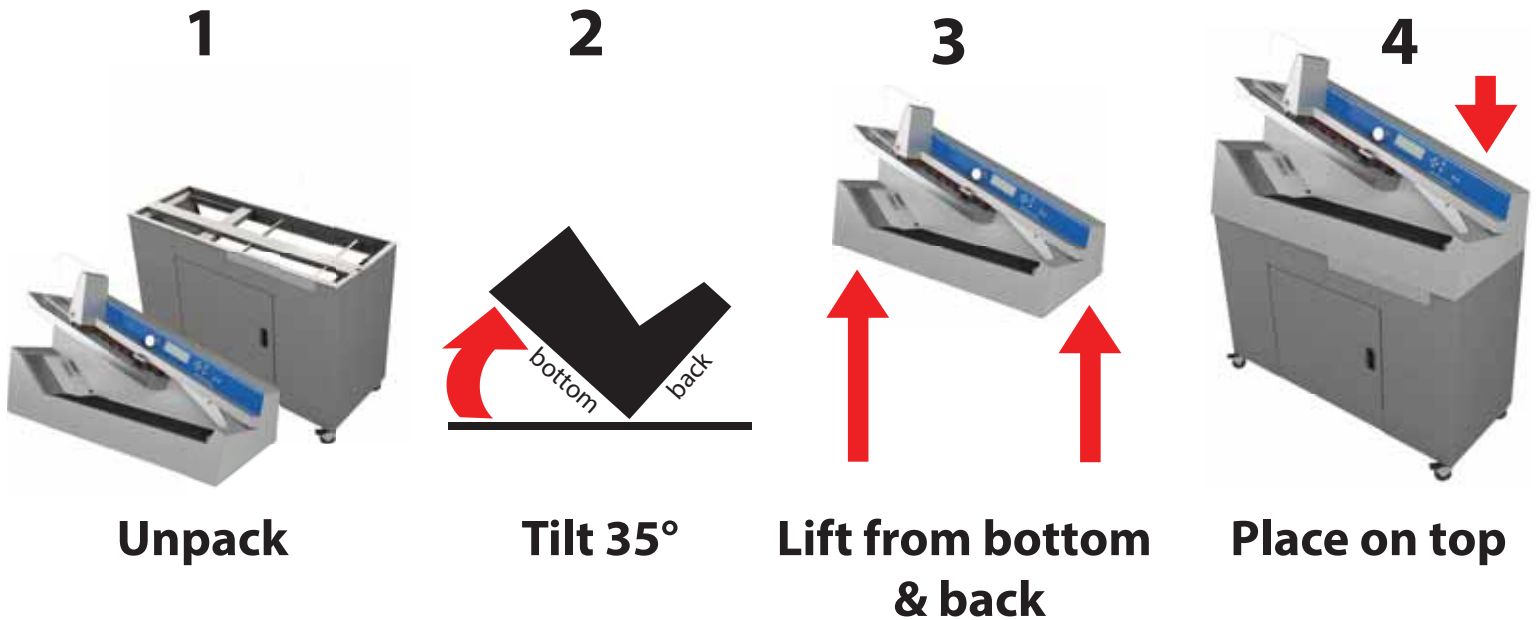

Once the boxes are unpacked. Make sure that the top and base of the Omotion Model 306 are beside one another on the ground. Engage the wheel brakes on the base.

Then, with 2 people, tilt the top piece until the back and the bottom of the top piece are at a 35° angle from the floor. Place your hands underneath the back and the bottom while squatting and then lift together with your legs.




Carefully walk the top piece over and hold it over the base.



Carefully place the back edge of the top piece on the base.



Then slowly lower until the bottom of the top piece is flat against the top of the base assembly.

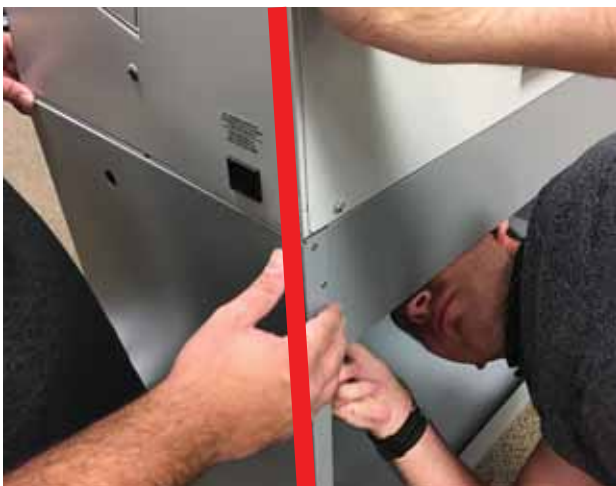

Be sure to line up the sides and the rear of the machine as flush as possible to align at least 4 screws with their pre-threaded holes.



Lay some type pad\* across the hard edge of the rear of the base. This will protect your body from the edge as you align the holes for the screws and drive them in.



Screw at least 4 Phillips\* screws into the top piece from below. Be sure to screw them in until they are snug.



Plug in the main power cord into the rear of the machine and power on to configure.