


Connectivity Device SendPro Install Instructions

The Connectivity Device SendPro enables you to add funds, perform automatic updates, and receive alerts using a cellular 4G network.

What's in the Box




Connectivity Device SendPro and two mobile antennas



Universal power supply and adapters



Ethernet cable




Velcro strips




Setup instructions

1. Assemble the mobile antennas to the Connectivity Device.



Screw the mobile antennas tightly to the device.




Adjust the angle of the antennas appropriately.

2. Plug the Ethernet cable.



Power up the sending device before connecting the cable.

Plug the Ethernet cable to the () port at the back of your sending device.

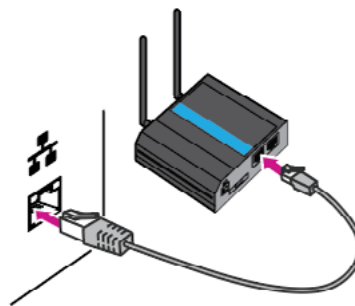

Then plug the other end to the LAN port on the connectivity device.




3. Power up the Connectivity Device and check power indicator.

Plug the power adapter to the power port on the connectivity device and into a power outlet.

Once power is on, the power LED will turn solid green.




Attach appropriate adapter to the power supply.

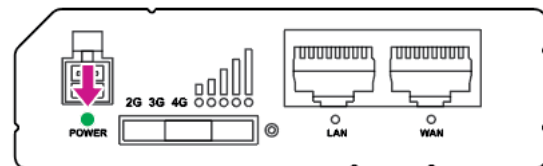


If the LED is not lighting up,
Visit the Pitney Bowes Support site located at the end of instructions.

4. Check connection indicator.

First, the signal strength LEDs will be flashing green. Second, the mobile network type LEDs will be flashing green.

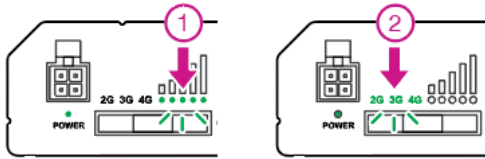

In about 2 ~ 3 minutes the rightmost network type LED and at least two signal strength LEDs should be turn to green.

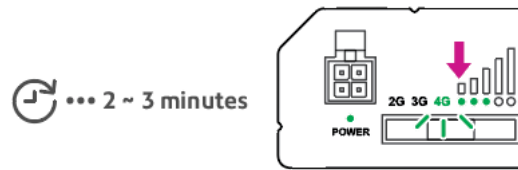


If that has not happened. [Visit the Pitney Bowes Support site located at the end of instructions.](#)

If not try the following procedure A or B.

Once they turn to green, move to step 5.


Procedure A

Move the device at least 3 feet or 1 meter away from any electric appliances that could be causing interference. You might relocate your sending device together or use a longer Ethernet cable if available.

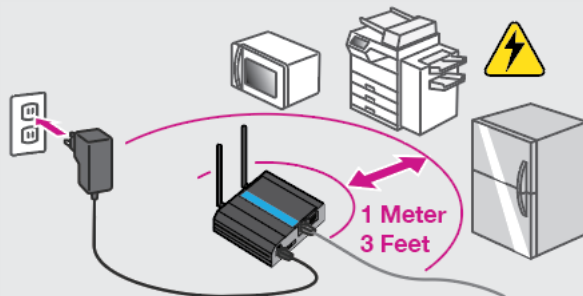

Procedure B

Move the device closer to a window or outside wall. You might relocate your sending device together or use a longer Ethernet cable if available.

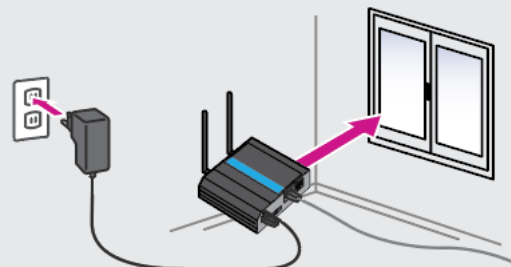

Plug in the power adapter then check the LEDs. If the required LEDs turn to green, move to step 5.



If the LEDs are still not turning to green.


[Visit the Pitney Bowes Support site located at the end of instructions.](#)

5. Check for flashing green on LAN LED.

You will see the flashing green on the LAN LED, signifying that the connection is live. Your sending device is ready for you to use.



Using the Velcro strips provided, secure the device as needed. Make sure to apply a Velcro strip in the middle of the back of the device. Ensure not cover any labels.

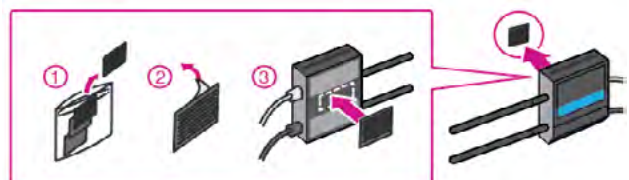

Pitney Bowes Support

 www.pb.com/support

 www.pb.com/ca/support

 www.pb.com/uk/support